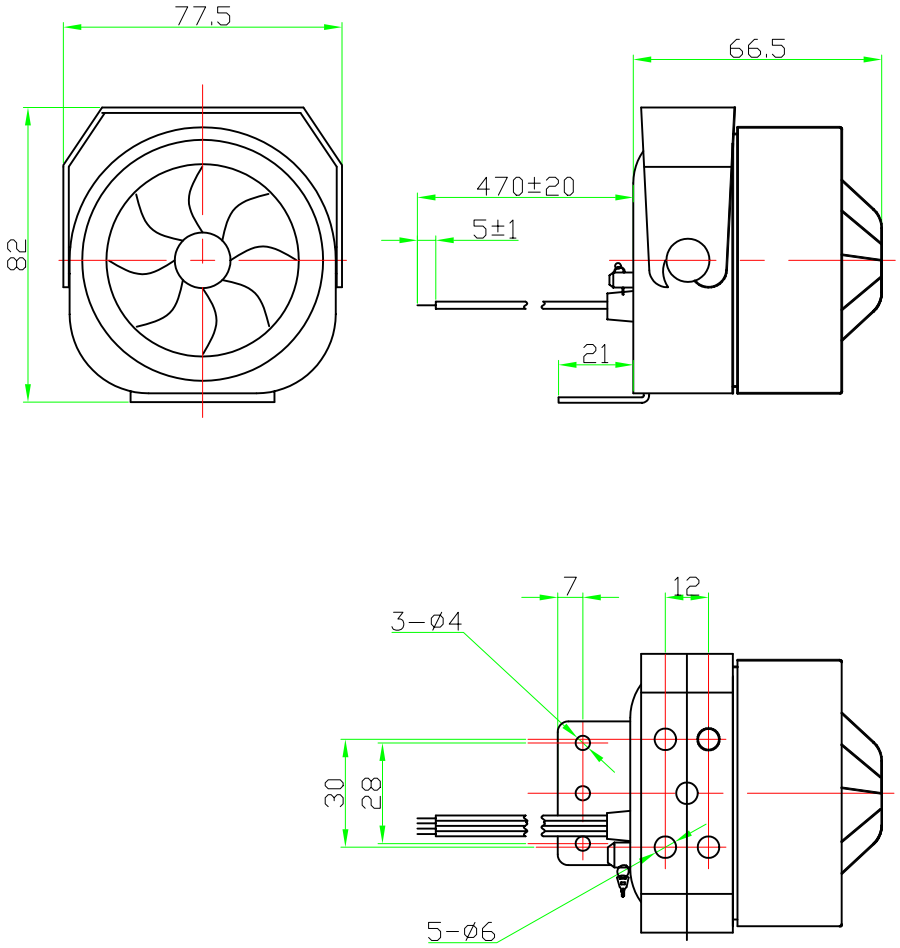

Specification (Test Condition, 25℃)

1. Housing Material/ Color..... ABS / Black
2. Voice Coil Impedance ..... 12 Ohm (at 1 KHz)
3. Voice Coil Dimension ..... Ø 25.4 mm(Dia.)
4. Magnet Size ..... Ø24.5*3.5 mm(Dia.*H)
5. Power Rating RMS ..... 15 W
6. Power Rating Peak ..... 20 W
7. Rated Voltage ..... 12 VDC
8. Range Voltage ..... 6--15 VDC
9. S.P.L. ..... min. 110 dB(at 1 meter, 12VDC)
10. Tone Nature ..... Siren
11. Current Draw ..... 550 mA Max.(at 12 VDC)
12. Load Test ..... 8 Hours (at 12 VDC)
13. Heat Test ..... 8 Hours (at 60℃)
14. Operating Temperature range ..... -20 ~ +60℃
15. Wires Connection ..... Red +12V
    ..... Blue Negative Trigger (-)
    ..... White Positive Trigger (+)
    ..... Black GND
16. Weight ..... 255 ±10 g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2° -1° ANGLES
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	04.02.10

DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT
http://www.dswbrand.com

Electron Siren
ES-78BUA1(20W)

UNIT	DWG NO.	
mm	E1.840.025	
SCALE	SHEET	VER
NOT TO SCALE		1.0