


# Specification (Test Condition, 25°C)

1. Housing Material/ Color ..... Metal / White
2. Rated Voltage ..... 12 VDC
3. Range Voltage ..... 6 -- 14 VDC
4. S.P.L. .... min. 108±3 dB(at 1 meter, 12VDC)
5. Tone Nature ..... Siren
6. Current Draw ..... 710 mA Max. (at 12 VDC)
7. Resonant Frequency ..... 1.5 -- 4.0KHz
8. Load Test ..... 8 Hours (at 12 VDC)
9. Heat Test ..... 8 Hours (at 85°C)
10. Operating Temperature range ..... -20 ~ +85°C
11. Wires Connection ..... Red +12V  
Black GND
12. Weight ..... 1010 ±20 g

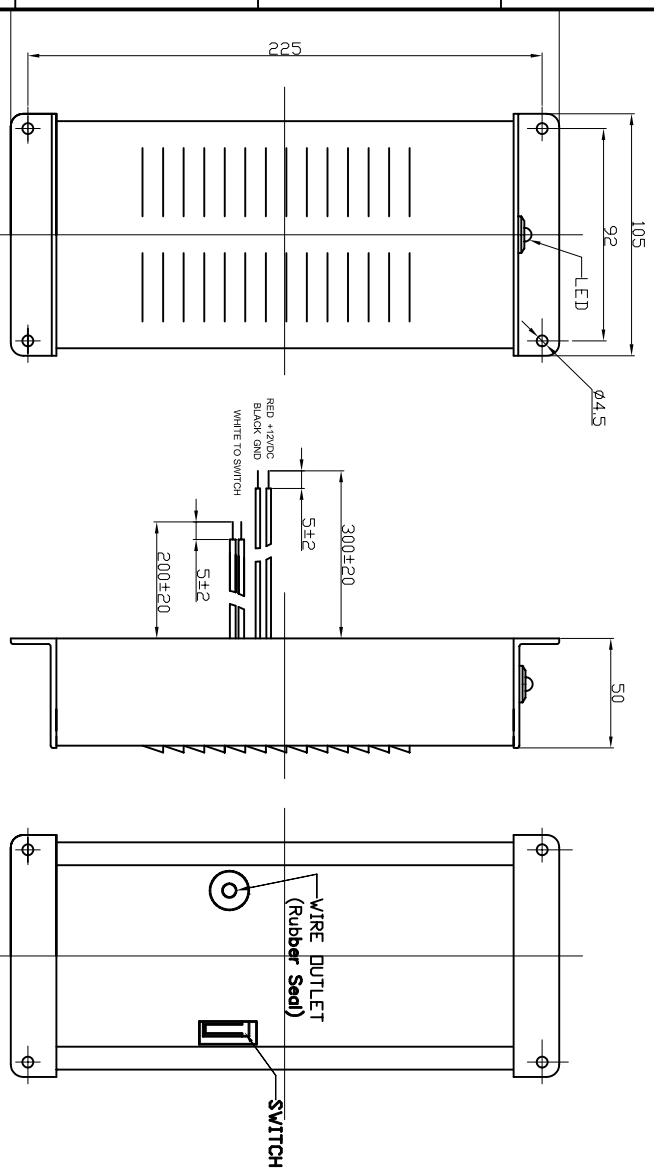

<b>DSW</b>	NINGBO DSW AUDIO & SECURITY EQUIPMENT <a href="http://www.dswbrnd.com">http://www.dswbrnd.com</a>			
Armored Siren				
<b>EAS-240</b>				
UNIT	DRAWN	APPROVED	DATE	SCALE
mm	CHECKED	APPROVED	DATE	NOT TO SCALE
FIRST ANGLE PROJECTION		04.01.12		7
No.	DESCRIPTION	APPROVED	DATE	SHEET
X XX XXX	DRAWN	APPROVED	DATE	VER
90° ANGLES ±2°	CHECKED	APPROVED	DATE	1.0
FIRST ANGLE PROJECTION		04.01.12		8