

Specification

(Test Condition, 25°C)


1.SCOPE

This specification is applied to the piezoelectric diaphragm.

2.MODEL NO. : MFT-35G-3.4A1

3.SPECIFICATION (at 25 °C)

- 3.1 Resonant Frequency : 3.4±0.5KHz
- 3.2 Resonant Resistance : 250 Ω max
- 3.3 Capacitance : 32000 pF±30% at 100Hz
- 3.4 Input Voltage : 30 Vp-p max
- 3.5 Operating Temperature : -20 to +50°C
- 3.6 Storage Temperature : -20 to +70°C
- 3.7 Dimension : as per Figure 1.

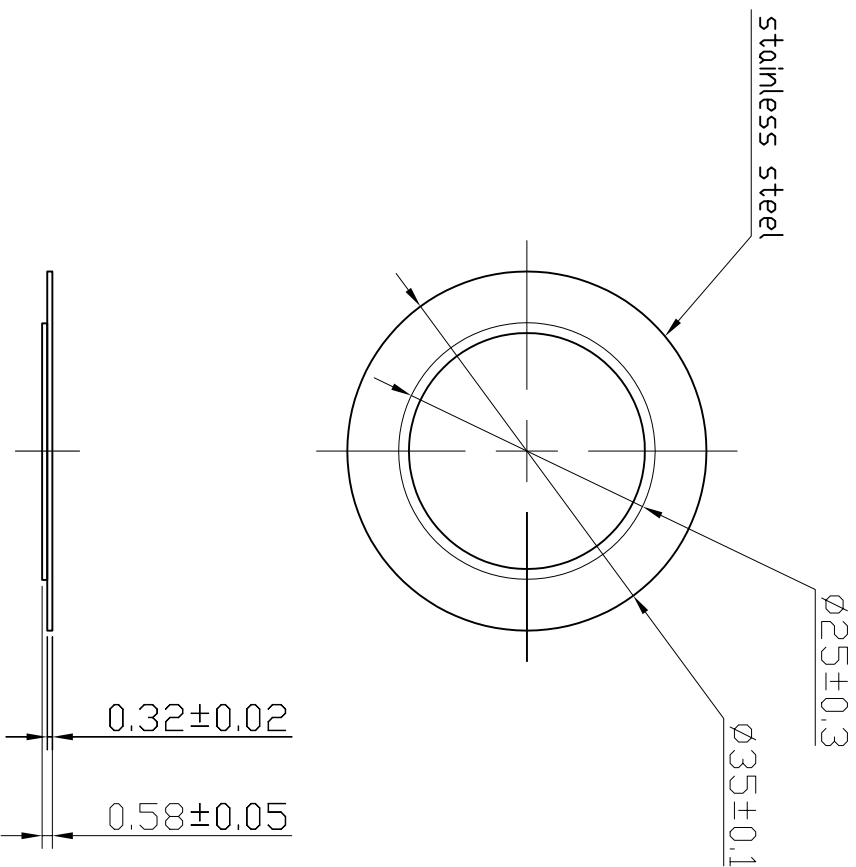

No.		DESCRIPTION		DATE	UNIT	
DESIGNER'S SIGNATURE		APPROVED		DATE	SCALE	
DRAWN		APPROVALS		DATE	NOT TO SCALE	
CHECKED		APPROVED		DATE	SHEET	
FIRST ANGLE PROJECTION		APPROVED		04.11.15	VER 1.0	
				DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT http://www.dswbrand.com fax:+86(574)87264906		
X XX + XXX + 90° FORMED ±2° ANGLES		DRAWN CHECKED APPROVED		Piezoelectric Diaphragm MFT-35G-3.4A1 mm E4.845.006		