



# Specification:

- \*Metal magnetic contacts
- \*Ideal for commercial application
- \*Spacers include
- \*Wire:#22AWG
- \*Longer leads,armored cable available
- \*Safety approvals:

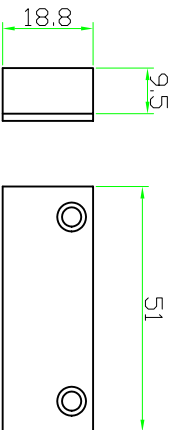

switch

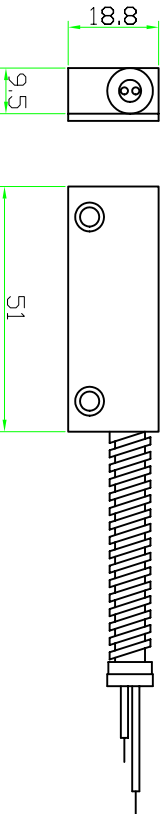

magnet

Part Number	Loop Type	Reed Form	Gap [Inch(mm)]	Maximum Initial Contact Resistance (ohm)	Maximum Contact Rating (w)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
MCS-1702	Closed	N/O	1 1/2+ (.40)	0.150	10	100	0.5
MCS-1702A	Open	N/C	1 1/2+ (.40)	0.150	3	30	0.2
MCS-1702C	Closed & Open	SPDT	1 1/2+ (.40)	0.150	3	30	0.2
MCS-1702D	DPDT	2SPDT	1 1/2+ (.40)	0.150	3	30	0.2
MCS-1702S	Closed & Open and Supervise	SPDT	1 1/2+ (.40)	0.150	3	30	0.2

<b>DSW</b> NINGBO DSW AUDIO & SECURITY EQUIPMENT <a href="http://www.dswbrand.com">http://www.dswbrand.com</a>	
Magnetic Contacts	
MCS-7102	
No.	DATE
DESCRIPTION	DATE
APPROVED	DATE
CHECKED	
APPROVED	04.01.15
UNIT	DWG.NO
mm	
SCALE	SHEET
NOT TO SCALE	E4.840.002
	VER 1.0