


Specification

(Test Condition, 25°C)

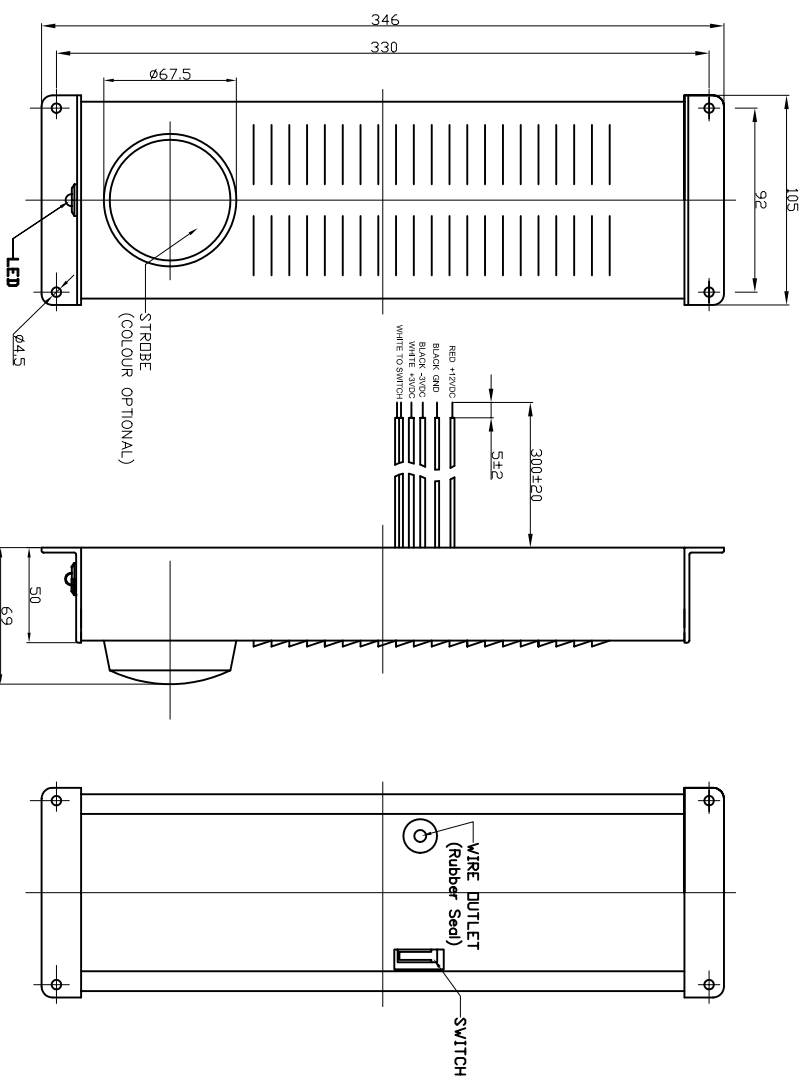

- Housing Material/ Color Metal / White
- Rated Voltage 12 VDC
- Range Voltage 6--14 VDC
- S.P.L. min. 115±3 dB(at 1 meter, 12VDC)
- Tone Nature Siren
- Current Draw 1400 mA Max. (at 12 VDC)
- Resonant Frequency 1.5 -- 4.0KHz
- Strobe light current Draw 150mA Max(at 12VDC)
- Strobe light Resonant Frequency 1-2Hz
- Operating life 200Hours Continuous Duty at 12VDC
- Load Test 8 Hours (at 12 VDC)
- Heat Test 8 Hours (at 85°C)
- Operating Temperature range -20 ~ +85°C
- Wires Connection Red +12VDC
..... Black GND
..... Black -3VDC
..... White +3VDC
..... White To Switch
- Weight 1380 ±20 g

No.		DESCRIPTION	APPROVED	DATE	DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT http://www.dswbrand.com	
DESIGNER'S SIGNATURE						
DRAWN		APPROVALS		DATE	Armored Siren	
CHECKED					EAS-346F	
FIRST ANGLE PROJECTION		APPROVED		04.03.19	SCALE	DWG. NO.
					NOT TO SCALE	E5.840.003
					SHEET	VER 1.0