
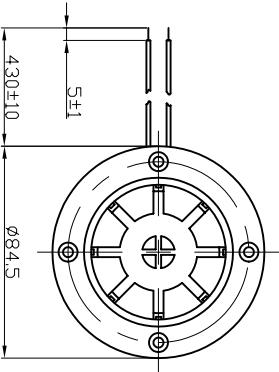
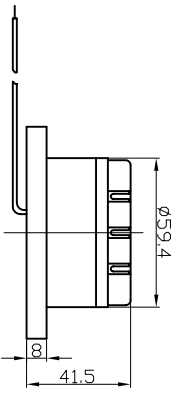
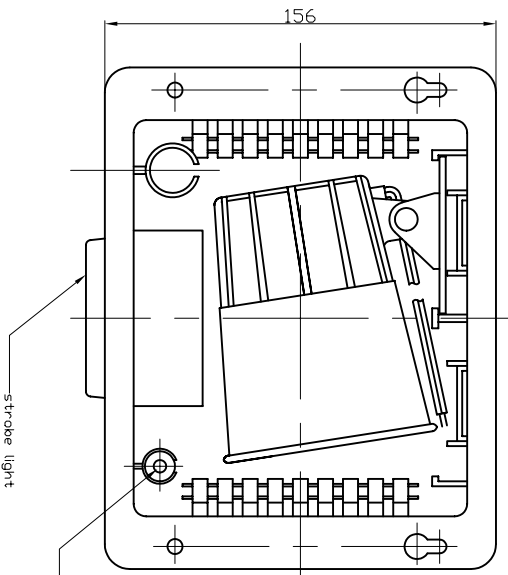



Specification (Test Condition, 25°C)

- 1. Housing Material ABS with Metal case
- 2. Power Rating RMS 15W
- 3. Power Rating Peak 20 W
- 4. Rated Voltage 12 VDC
- 5. Range Voltage 6-14 VDC
- 6. S.P.L. 110+/- 3 dB(at 1 meter, 12VDC)
- 7. Tone Nature
- 8. Current Draw 900 mA Max. (at 12 VDC)
- 9. Load Test 8 Hours (at 12 VDC)
- 10. Heat Test 8 Hours (at 85°C)
- 11. Flash rate..... 80/per minutes±15
- 12. Operating Temperature range -20 ~ +85°C
- 13. Weight 790±30

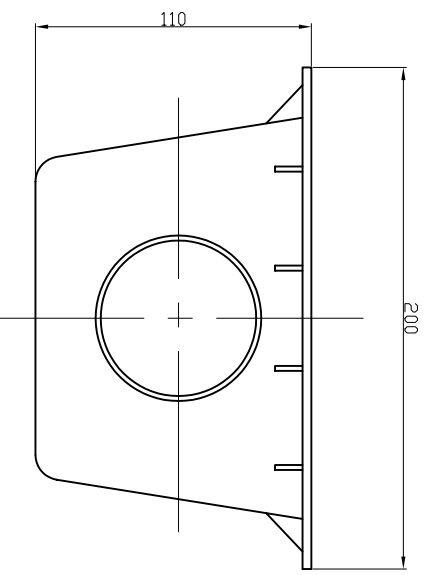

DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT <small>http://www.dswbrand.com fax: +86(574)87264906</small>		UNIT		SCALE		SHEET		VER	
Armored Siren		mm		NOT TO SCALE		E5.840.010		1.0?	
EAS-2015		DRAWN		APPROVED		DATE		DATE	
NO. OF OVERHAULS		CHECKED		APPROVED		DATE		DATE	
X		X		X		X		X	
90° FORMED ±2°		FIRST ANGLE PROJECTION		APPROVED		04.01.09?		04.01.09?	