


magnet

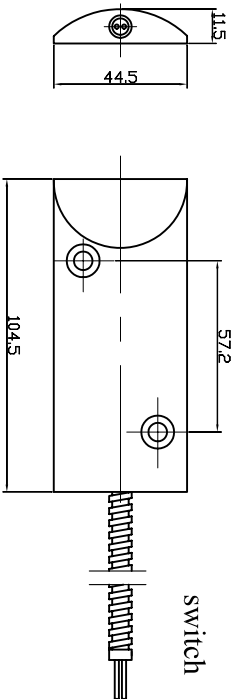

switch

Specification:

- *Extrude aluminum case for harsh environment
- *Wire:#22AWG with 22"armored cable
- *Longer cable available on request
- *Optional"L"bracket



Part Number	Loop Type	Reed Form	Gap [Inch/(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
MCS-1203	Closed	N/O	3" (75)	0.150	10	100	0.5
MCS-1203WG	Closed	N/C	3 1/2" (.90)	0.150	10	100	0.5
MCS-1203A	Open	N/C	3 (72)	0.150	3	30	0.2
MCS-1203C	Closed&Open	SPDT	3 (72)	0.150	3	30	0.2
MCS-1203D	DPDT	2-SPDT	3 (72)	0.150	3	30	0.2

DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT http://www.dswbrand.com , fax: +86(574)87264906		Magnetic Contacts		UNIT	DWG NO.	SHEET
MCS-1203		DATE		mm	E4.840.040	VER 1.0
No.	DESCRIPTION	APPROVED	DATE	CHECKED	NOT TO SCALE	
COILED OVERMOLDING X XX + 90° FORMED ±2° FIRST ANGLE PROJECTION		APPROVED	05.07.06	APPROVED	SCALE	