

Specification

(Test Condition, 25°C)


1.SCOPE

This specification is applied to the piezoelectric diaphragm.

2.MODEL NO. : MFT-27T-3.9A1

3.SPECIFICATION (at 25 °C)

- 3.1 Resonant Frequency : 3.9±0.5KHz
- 3.2 Resonant Resistance : 250 Ω max
- 3.3 Capacitance : 25000 pF±30% at 120Hz
- 3.4 Input Voltage : 30 Vp-p max
- 3.5 Operating Temperature : -20 to +50°C
- 3.6 Storage Temperature : -20 to +70°C
- 3.7 Dimension : as per Figure 1.

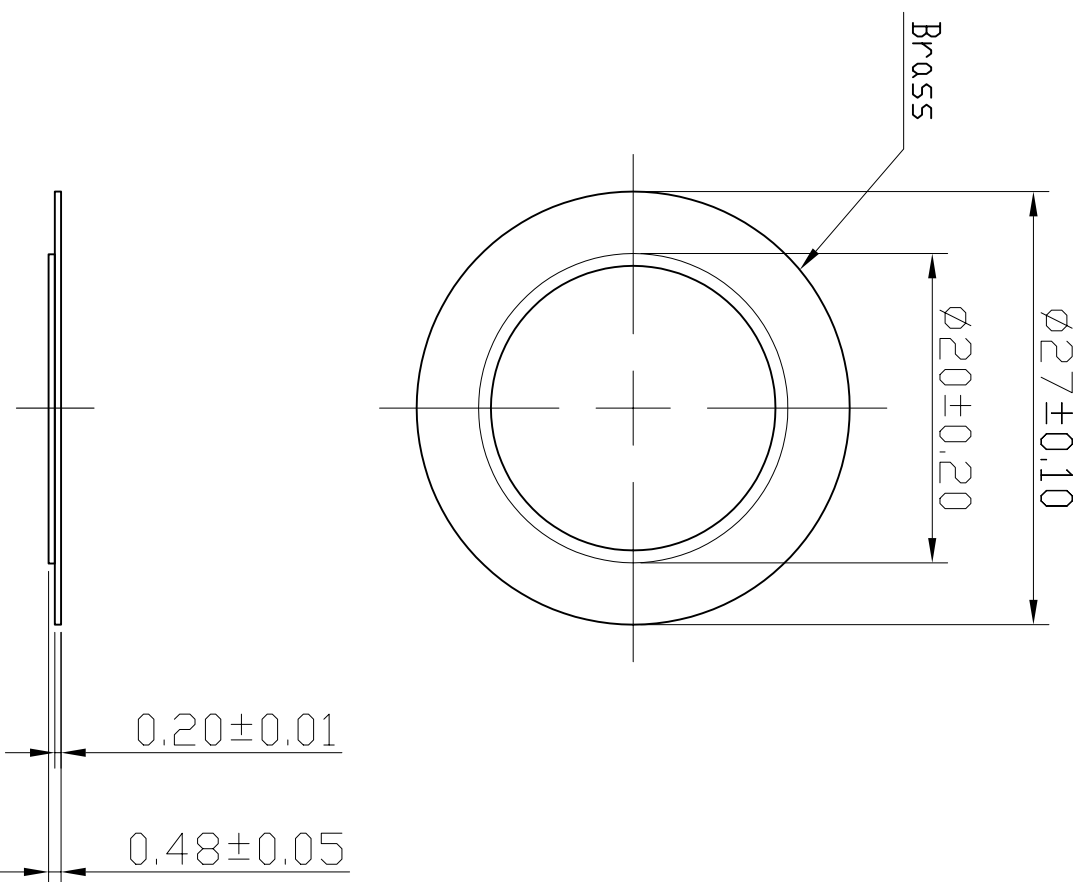

DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT http://www.dswbrand.com fax:+86(574)87264906		UNIT: mm SCALE: NOT TO SCALE	
No.	DESCRIPTION	APPROVED	DATE
PIEZOELECTRIC DIAPHRAGM MFT-27T-3.9A1		DRAWN CHECKED APPROVED	DATE 05.04.15
DSG XX 90° FORMED ±2° FIRST ANGLE PROJECTION		DWG.NO: E4.845.009 SHEET: VER 1.0	