
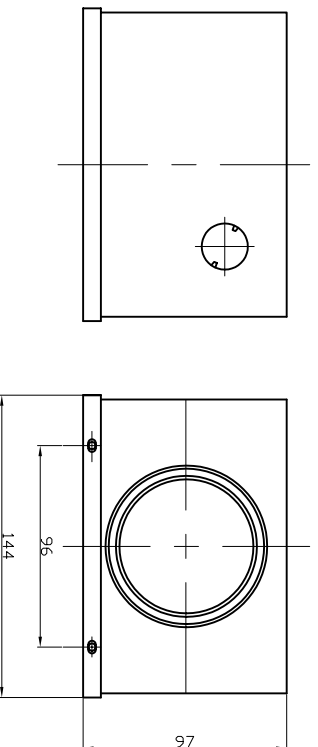


Specification

(Test Condition, 25°C)

- Outer Metal Housing Material/ Color Stainless Steel / Silver
- Inner Plastic Housing Material/ Color ABS / Black
- Voice Coil Impedance 6 Ohm (at 1 KHz)
- Voice Coil Dimension Ø 25.4 mm(Dia.)
- Magnet Size Ø60*32*10 mm(Dia.* dia.*H)
- Rated Voltage 12 VDC
- Range Voltage 6 ~15 VDC
- S.P.L. (Door Clouse)..... 98±3 dB(at 1 meter, 12VDC)
- S.P.L.(Door Open)..... 105±3 dB(at 1 meter, 12VDC)
- Current Draw 800 mA Max.(at 12 VDC)
- Load Test 8 Hours (at 12 VDC)
- Heat Test 8 Hours (at 60 °C)
- Operating Temperature range -20 ~ +60 °C
- Wires Connection Red +12V (Siren)
..... Yellow +12V (Continuous)
..... White GND
..... White (Switch)
- Weight 1125±20 g

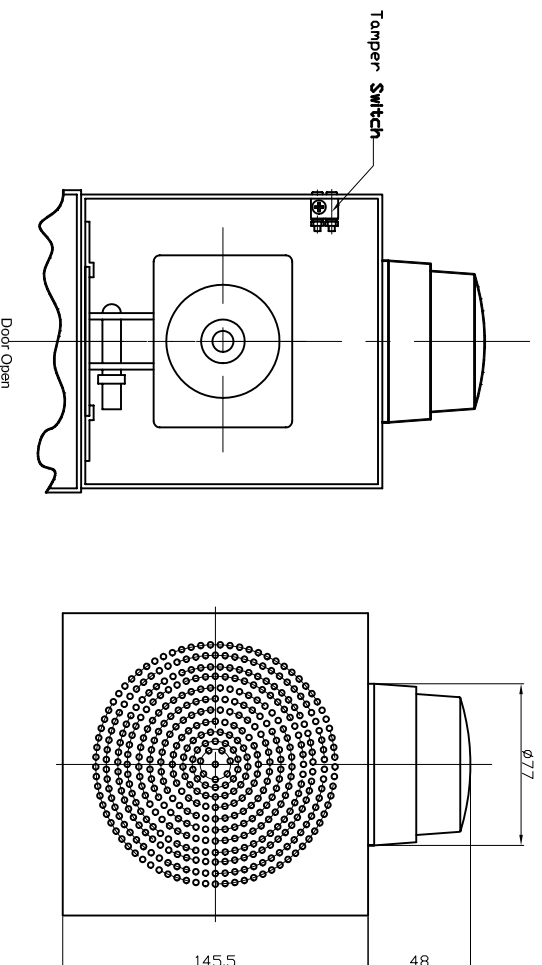

				NINGBO DSW AUDIO & SECURITY EQUIPMENT			
				DSW http://www.dswbrand.com			
No.	DESCRIPTION	APPROVED	DATE	Armored Siren EAS-144F			
NOTED OUTLINE: X # XX # XXX # 90° FORMED ±2° FIRST ANGLE PROJECTION		APPROVALS	DATE	UNIT mm			
		DRAWN		DWG.NO.			
		CHECKED		E5.840.006			
		APPROVED	04.01.12	SCALE	NOT TO SCALE	SHEET	VER
							1.1