

Specification

(Test Condition, 25℃)

1. Housing Material/ Color

Metal / White
2. Rated Voltage

12 VDC
3. Range Voltage

6 --14 VDC
4. S.P.L.

min. 115±3 dB(at 1 meter, 12VDC)
5. Tone Nature

Siren
6. Current Draw

1400 mA Max.(at 12 VDC)
7. Resonant Frequency

1.5 -- 4.0KHz
8. Load Test


8 Hours (at 12 VDC)
9. Heat Test

8 Hours (at 85℃)
10. Operating Temperature range

-20 ~ +85℃
11. Wires Connection

Red +12V
Black GND
12. Weight

1300 ±10 g

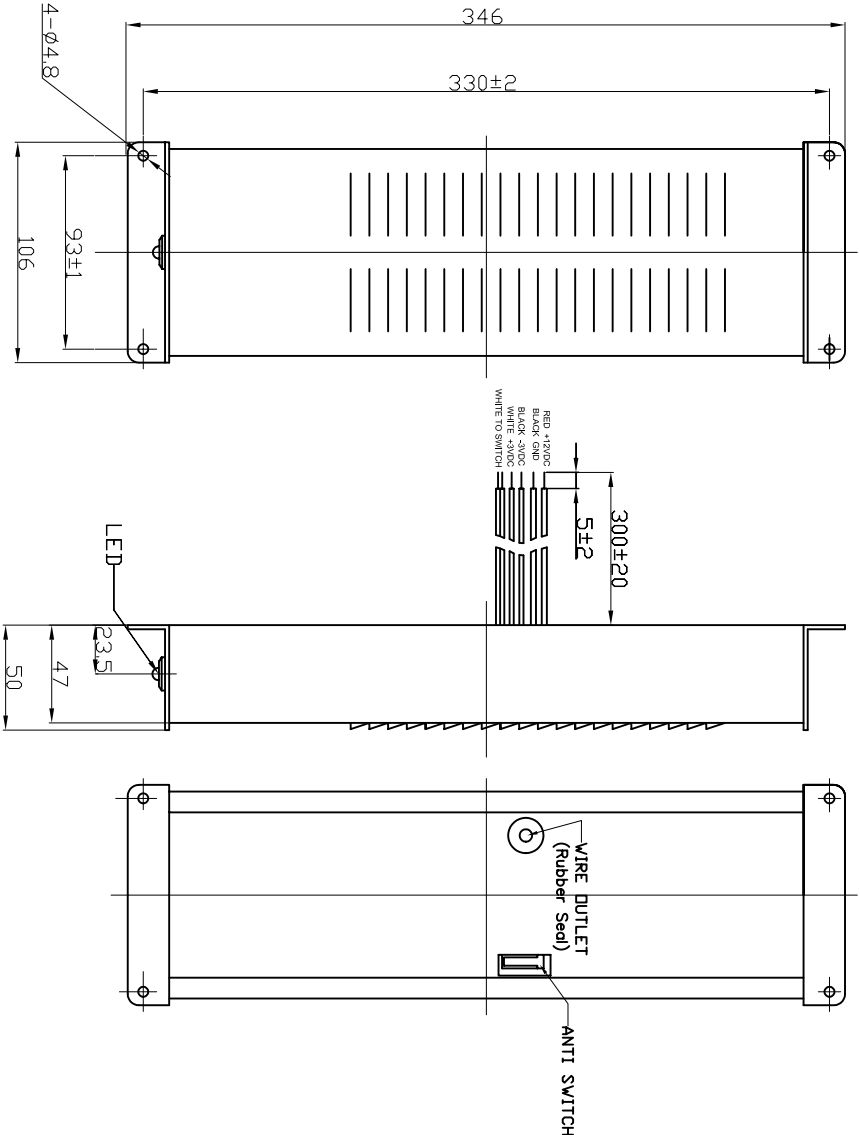

				NINGBO DSW AUDIO & SECURITY EQUIPMENT				
				<i>DSW</i> <i>http://www.dswbrand.com</i>				
No.	DESCRIPTION	APPROVED	DATE	Armored Siren EAS-346				
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	DATE					
XX ±								
XXX ±								
90° ANGLES ±1°								
FIRST ANGLE PROJECTION				SCALE	DWG NO.		E5.840.002	
				04.01.12				
APPROVED				NOT TO SCALE	SHEET			
				YEAR				1.0